




AN ENTERPRISE OF RC COMPANY 

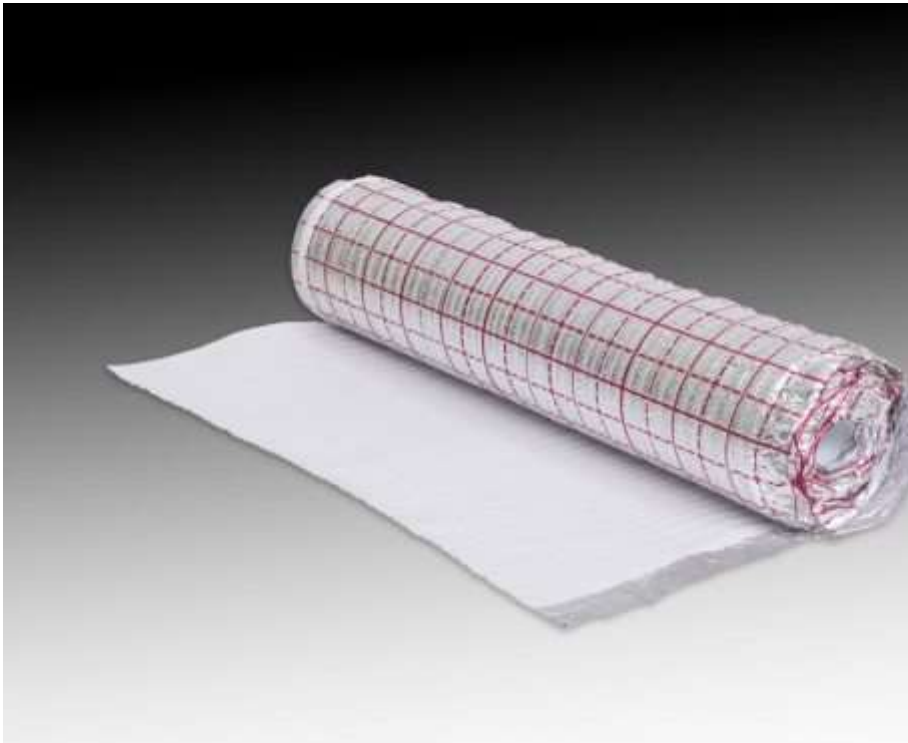

## ALUMINIZED LEVELING FOAM FLAME RETARDANT THERMAL INSULATION SHEET 3MM HIGH DENSITY FOR FLOATING FLOORS WITH ADHESIVE TAPE

- **Material:** High Density EPE (Expanded Polyethylene) with metalized aluminum foil printed with a flame retardant.
- **Use:** Impact noise reduction and thermal insulation in floating floor installations and in areas with high electrostatic charge / Roof insulation.
- **Color:** Metallic with pre-cut red lines.
- **Dimensions:** Width: 1 mt. Length: 10 to 250 meters. Thickness: 3mm.
- **Calibers** —